


**GROUP 600
ACCESORIES
MOD. 616A**



**DAVINCI
VALVES™**

**TECHNICAL
DATA SHEET
WATER Series**

DRESSER COUPLING

**DAVINCI
VALVES™**



**QUALITY
ASSUREMENT**

**DAVINCI
VALVES™**



**PRODUCT QT
ASSUREMENT**

**DAVINCI
VALVES™**



**COMPANY QT
ASSUREMENT**

www.davincivalves.com

18 Dongyu Street, Square One,
11th Floor 1101, Jinjiang District,
Chengdu, Sichuan CHINA

10F/Tower A, Billion Center,
1 Wang Kwong Road, Kowloon Bay
Kowloon HONG KONG

DRESSER COUPLING

Ref.616A

APPLICATION:

Water, HVAC installations, irrigation, industry, others

WORKING CONDITIONS:

Working Temperature:

- 10 °C - + 120 °C. for EPDM

- 10 °C - + 82 °C. for NBR

STANDARDS:

Comply with EN545/ISO2531/EN14525

Coating EN30677


Pressure Test: EN 12266-1.

GENERAL CHARACTERISTICS:

Size DN40 to DN600,

Powder Epoxy Cured coating 250 Mic

For pipes in DI, STEEL, PVC, PE HDPE AC etc...

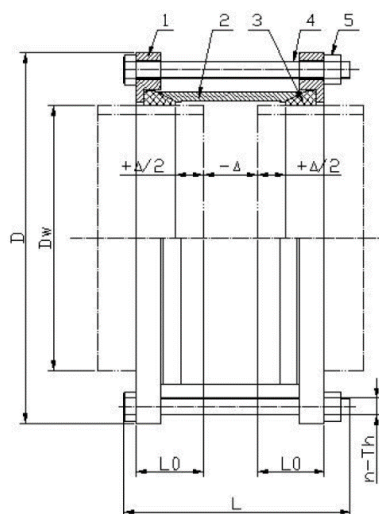

NO.	PART	MATERIAL	QTY
1	COVER	CARBON STEEL	2
2	BODY	CARBON STEEL	1
3	GASKET	RUBBER	2
4	BOLT	CARBON STEEL	--
5	NUT	CARBON STEEL	--


SIZE	L(mm)	≈L0(mm)	Δ(mm)	D(mm)	Dw(mm)	n-Th
DN50	208	67.5	45	150	60	4-M12
DN80	208	67.5	45	165	89	4-M12
DN100	208	67.5	45	195	114	4-M12
DN150	220	67.5	45	255	168	4-M16
DN200	220	67.5	45	310	219	4-M16
DN300	273	82.5	55	440	323	6-M20

All the components can be substituted with equivalent or higher-class materials.

DAVINCI VALVES LTD, is constantly looking at all ways of improving our products and services related to the water, fire and industry sector and therefore we reserve the right to change, without prior notice, any of the data contained here. Please contact our Technical Sales Department for detailed advice.
© 2018 DAVINCI VALVES LTD.

www.davincivalves.com info@davincivalves.com +34 616553797 / +86 17340168233
18 Dongyu Street, Square One 11th Floor 1101. Jinjiang District, Chengdu, Sichuan Province, China

"For professionals who wants more"



DAVINCI
VALVES™

www.davincivalves.com