

**GROUP 300
COMPLEMENTS
MOD. 330/70**



**DAVINCI
VALVES™**

**TECHNICAL
DATA SHEET
WATER Series**

DISMANTLING JOINTS S.STEEL

**DAVINCI
VALVES™**



**QUALITY
ASSUREMENT**

**DAVINCI
VALVES™**



**PRODUCT QT
ASSUREMENT**

**DAVINCI
VALVES™**



**COMPANY QT
ASSUREMENT**

www.davincivalves.com

18 Dongyu Street, Square One,
11th Floor 1101, Jinjiang District,
Chengdu, Sichuan CHINA

10F/Tower A, Billion Center,
1 Wang Kwong Road, Kowloon Bay
Kowloon HONG KONG

DISMANTLING JOINTS S.STEEL Ref.330A / PN 10-16

APPLICATION:

Are used next to valves, in installations where occasional dismantling is necessary, without substituting any pipe.

STANDARDS:

The size meets standard GB/T12465-2002
Mounting with flanges: EN 1092-1 PN10 / PN16.
Pressure Test: EN 12266-1.


GENERAL CHARACTERISTICS:

Dismantling joint are three flanged fittings that accommodate longitudinal adjustment and can be locked at the required length with the tie bars supplied.

Range from ND50 up to ND3200.
BODY WELDING CONSTRUCTION

WORKING CONDITIONS:

Máximum Working Pressure: 1.6 MPa
Working Temperature: - 5 °C - + 100 °C.

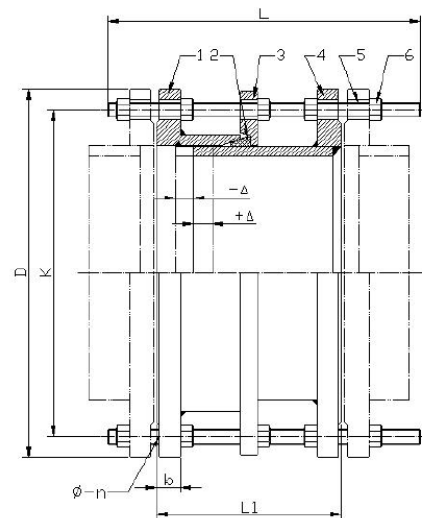

No	PART	MATERIAL
1	BODY	SS316L
2	GASKET	EPDM/NBR
3	COVER	SS316L
4	PIPE FLANGE	SS316L
5	STUD	A4
6	NUT	A4


All the components can be substituted with equivalent or higher-class materials.

DISMANTLING JOINTS S.STEEL Ref.330A / PN 10-16

ND	OD PIPE	L	L+-	D	D1	n-TH	b	D	D1	n-TH	b		
65	76	200	40	160	130	4-M12	16	185	145	4-M16	20		
80	89			190	150	4-M16	18	200	160	8-M16	22		
100	114			210	170	4-M16	18	220	180	8-M16	24		
125	140			240	200	8-M16	20	250	210	8-M16	26		
150	168			265	225	8-M16	20	285	240	8-M20	26		
200	219			320	280	8-M16	22	340	295	8-M20	28		
250	273			375	335	12M16	24	395	350	12-M20	28		
300	325	220	50	440	395	12-M20	24	445	400	12-M20	28		
350	377			490	445	12-M20	26	505	460	16-M20	30		
400	426			540	495	16-M20	28	565	515	16-M24	32		
450	480			595	550	16-M20	28	615	565	20-M24	32		
500	530			645	600	20-M20	30	670	620	20-M24	34		
600	630			755	705	20-M24	30	780	725	20-M27	36		
700	720			860	810	24-M24	32	895	840	24-M27	40		
800	820	350	60	975	920	24-M27	34	1015	950	24-M30	44		
900	920			1075	1020	24-M27	36	1115	1050	28-M30	46		
1000	1020			1175	1120	28-M27	36	1230	1160	28-M33	50		
1200	1220			370	60	1405	1340	32-M30	40	1455	1380	32-M36	56
1400	1420					1630	1560	36-M33	44	1675	1590	36-M39	62
1600	1620			380	60	1830	1760	40-M33	48	1915	1820	40-M45	68
1800	1820					2045	1970	44-M36	50	2115	2020	44-M45	70
2000	2020	400	80	2265	2180	48-M39	54	2325	2230	48-M45	74		
2200	2220			2475	2390	52-M39	60	2550	2440	52-M52	80		
2400	2420			2685	2600	56-M39	62	2760	2650	56-M52	82		
2600	2620			2905	2810	60-M45	64	2960	2850	60-M52	88		
2800	2820	450	80	3115	3020	64-M45	68	3180	3070	64-M52	94		
3000	3020			3315	3220	68-M45	70	3405	3290	68-M56	100		
3200	3220			3525	3430	72-M45	76						

All the components can be substituted with equivalent or higher-class materials.

"For professionals who wants more"



DAVINCI
VALVES™